

TECHNICAL SPECIFICATION

DECOR SPOTLIGHT PICASSO



Technical data

- Nominal voltage: 230V/50-60Hz
- Light source: SMD 2835
- Body: Metal
- Beam Angle: 30°
- Operating temperature: 50-60°
- Protection level against moisture and dust: IP20
- Average Lifetime: 30 000h
- Switch on/off > 15000
- Non dimmable

Areas of application

- Trade facilities
- Shops
- Framed pictures
- Art galleries


Dimensions

Description	Colour	Watt (W)	Colour temp. (K)	Whole fixture lumens (lm)	Size			Cat. Number
					Width (mm)	Length (mm)	Height (mm)	
LED Picture Light	Antique brass	12	4000	960	70	675	190	955PICASSO12/AB
LED Picture Light	Satin nickel	12	4000	960	70	675	190	955PICASSO12/SN
LED Picture Light	Antique brass	8	4000	640	70	495	180	955PICASSO8/AB
LED Picture Light	Satin nickel	8	4000	640	70	495	180	955PICASSO8/SN

Product benefits

- Lower maintenance cost thanks to longer lifetime
- Reduced operational cost thanks to lower energy consumption.
- Modern appearance
- Mercury free.
- Maximum resistance to switching loads.
- Correct operation even at low temperature.
- Instant-on light.

Energy efficiency

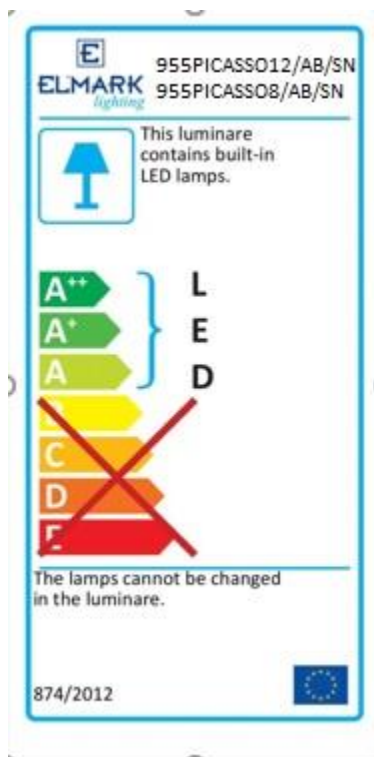

Standards

EN 55015 EN 61000-3-2 EN 61547

EN 60598-1; EN 60598-2-2

