

TECHNICAL SPECIFICATION

Bathroom Downlights - GL102 - 5



Technical data

- Nominal voltage: 230V / 50Hz
- Lamp power: 2x13W
- Lampholder designation: G24q
- Type of light source (not included commercial kit): 2pcs Compact fluorescent lamps PLC-2P (TC-D) or PLC-4P (TC-DEL)
- Operating mode:
 - Electronic control gear for PLC-4P type lamp (not included commercial kit)
 - Magnetic control gear for PLC-2P type lamp (not included commercial kit)
- Body material: Sheet steel with aluminium ring
- Diffuser: Glass with matt round
- Reflector: Aluminium mirror
- Type of Installation: Recessed mounting for indoor use
- Body color: white, satin nickel
- Dust and humidity protection level: IP20
- Protection against electric shock: I
- Protection against ignition and fire: Class F

Areas of application

- Bathrooms
- Damp spots

Product benefits


- Safety
- Stylish design
- Easy fixing

Variants and dimensions



Model	Watt	Size (mm)			Colour body	Catalogue number	Packing (pcs)
		Diameter	Height	Diameter 1			
GL102 – 5	2X13W	168	100	150	white	9299441025/W	12
GL102 – 5	2X13W	168	100	150	satin nickel	9299441025/TCH	12

Energy efficiency

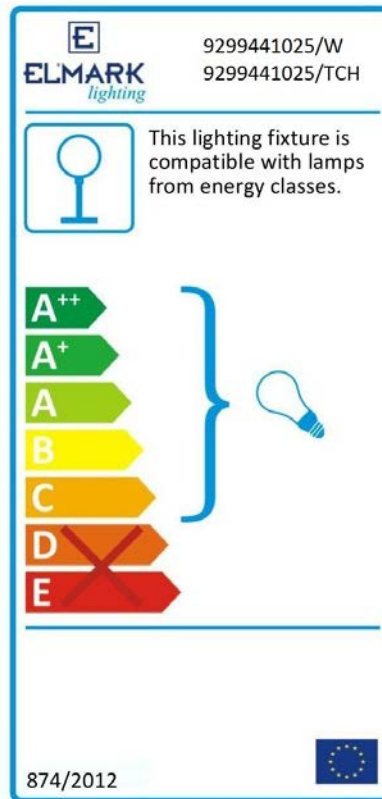

Barcodes

Barcode	Catalogue number
3800131168214	9299441025/W
3800131168221	9299441025/TCH

Standards

EN 60598-1

EN 60598-2-2

