

TECHNICAL SPECIFICATION

LED Downlights GL201LED



Technical data

- Power: 2x10W; 2x15W
- Colour temperature: 4000K; 2700K
- Rated voltage: 230V / 50/60Hz
- Lumens /whole fixture/:
 - 2x10W – 1600lm
 - 2x15W – 2400lm
- Light source: LED lamp PLC
- Lampholder: G24d
- Material: sheet steel with aluminum ring
- Body colour: white, satin nickel
- Diffuser: matt glass
- Reflector: aluminum mirror
- Installation: recessed mounting for indoor use
- Protection against dust and moisture: IP20
- Long life: 30 000 hours
- Beam angle: 120°
- Protection against electric shock: I
- Surface requirements: Class F


Areas of application

- Modern Residential Buildings
- Commercial buildings
- Offices
- Hotels
- Recreation facilities

Product benefits


- Lightweight body
- Simple appearance
- Easy installation

Variants and dimensions

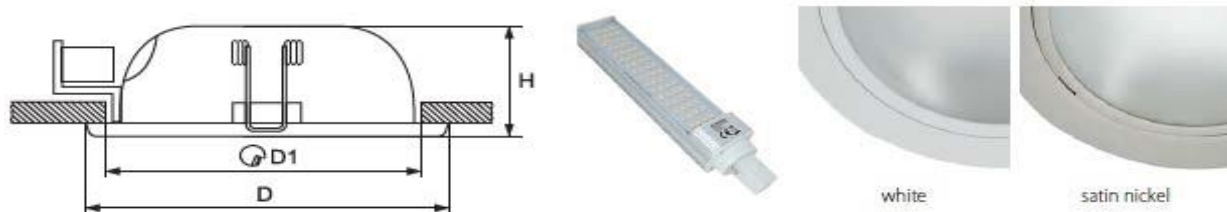

Watt	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
				D	H	D1		
2x10W	1600	4000	white	226	110	210	92201LED01	1
2x10W	1600	2700	white	226	110	210	92201LED03	1
2x10W	1600	4000	satin nickel	226	110	210	92201LED02	1
2x10W	1600	2700	satin nickel	226	110	210	92201LED04	1
2x15W	2400	4000	white	226	110	210	92201LED05	1
2x15W	2400	2700	white	226	110	210	92201LED07	1
2x15W	2400	4000	satin nickel	226	110	210	92201LED06	1
2X15W	2400	2700	satin nickel	226	110	210	92201LED08	1

Energy efficiency

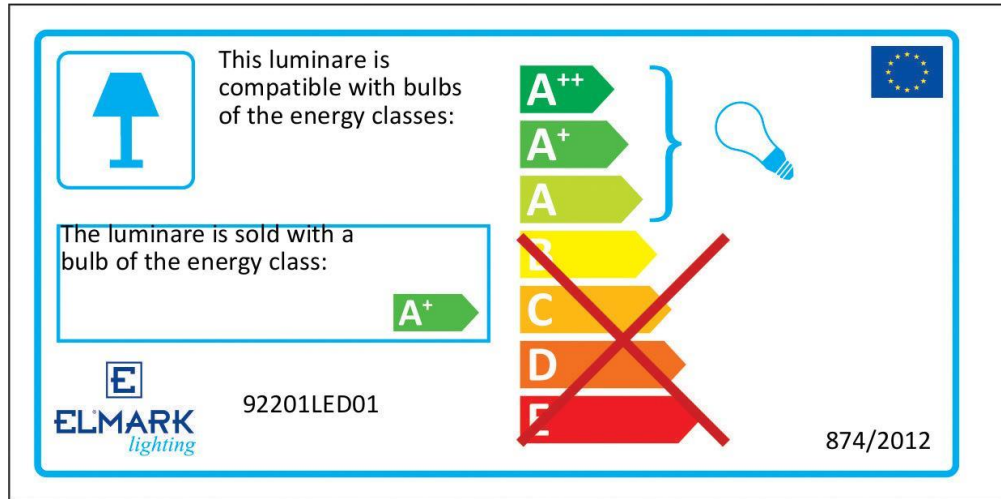

Barcodes

Barcode	Catalogue number
3800131189998	92201LED01
3800131190000	92201LED02
3800131190017	92201LED03
3800131190024	92201LED04
3800131190031	92201LED05
3800131190048	92201LED06
3800131190055	92201LED07
3800131190062	92201LED08

Standards

EN 55015 EN 61000-3-2; EN
61000-3-3 EN 61547 EN
60598-1; EN 60598-2-2

