

## TECHNICAL SPECIFICATION

### BELLA Luminaire SMD2835



#### Technical data

- Power: 20W/40W/55W
- Rated voltage: 230V / 50-60Hz
- LED type: SMD
- Light source: EPISTAR
- Luminous flux:
  - 20W - 1600lm
  - 40W - 3200lm
  - 55W - 4400lm
- Color temperature: 4000-4300K
- Protection against dust and moisture: IP21
- Ambient temperature: -15°C ÷ +45°C
- Body colour: grey
- Type: body with inox clips
- Diffuser: mat diffuser
- Protection against dust and moisture: IP65
- Long life: 30000 hours
- Colour rendering index: Ra≥80

## Areas of application

- Damp areas
- Dusty environment
- Kitchen premises
- Roofed outdoor areas


## Product benefits

- Replacement of conventional fluorescent tubes with highly efficient LED strip
- Installation options: surface ceiling mounting
- Low power consumption
- Repeated switch-on/off does not affect the lifespan of the luminaire
- Instant light with maximum luminous flux
- No ultraviolet and infrared rays
- Stable and functional light distribution

## Variants and dimensions

Watt	Colour temp. (K)	Colour body	Size			Catalogue number	Packing (pcs)
			Length	Width	Height		
20W	4000-4300	grey	600	80	70	9BR20LED	1
40W	4000-4300	grey	1200	80	70	9BR40LED	1
55W	4000-4300	grey	1476	80	70	9BR55LED	1

## Energy efficiency

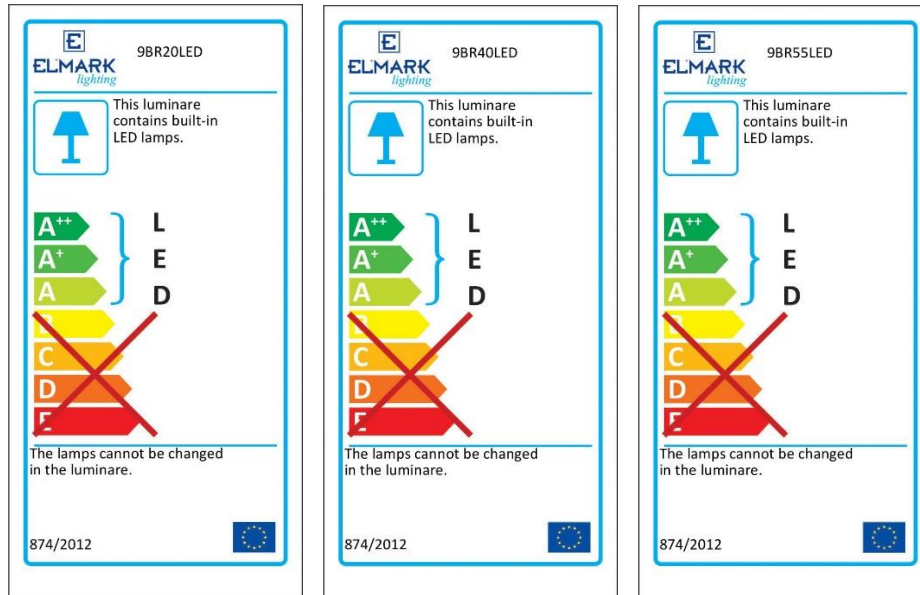

## Barcodes

Barcode	Catalogue number
3800131192417	9BR20LED
3800131192424	9BR40LED
3800131192431	9BR55LED

## Standards

EN 55015

EN 61000-3-2 ; EN 61000-3-3

EN 61547

EN 60598-1 ; EN 60598-2-2

