

## TECHNICAL SPECIFICATION

### INDOOR LAMP LED PANELS STELLAR ROUND



#### Technical data

- Nominal voltage: 230V/50-60Hz
- Power: 6W/12W/ 18W/ 24W
- Colour temperature: 2700K / 4000K
- LED type: SMD2835
- Beam Angle: 120°
- Starting time: 0.5s
- Power factor:  $\lambda > 0.55$
- Colour rendering index: Ra $\geq$ 80
- Average Lifetime: 15 000h
- Switch on/off > 10000
- Recessed mounted luminaire
- Non dimmable

**Product benefits:**

- Lower maintenance cost thanks to longer lifetime
- Reduced operational cost thanks to lower energy consumption.
- Mercury free.
- Maximum resistance to switching loads.
- Correct operation even at low temperature.
- Instant-on light.


**Areas of application:**

- General illumination
- Domestic applications
- Trade facilities
- Schools

**Variants and dimensions:**

Watt	Colour	LED lamp lumens (lm)	Colour temp. (K)	Size			Catalogue number
				Diameter	Height	Diameter1	
6W	White	420	2700	120	21	105	99XLED610
6W	White	420	4000	120	21	105	99XLED609
12W	White	840	2700	174	21	164	99XLED612
12W	White	840	4000	174	21	164	99XLED611
18W	White	1260	2700	225	21	205	99XLED615
18W	White	1260	4000	225	21	205	99XLED614
24W	White	1680	2700	300	21	280	99XLED621
24W	White	1680	4000	300	21	280	99XLED620

## Energy efficiency:

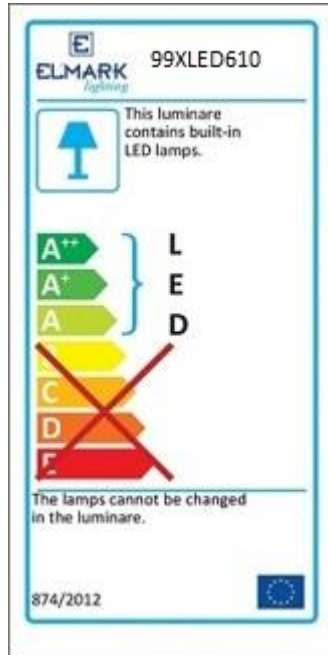

## Standards:

EN 55015

EN 61000-3-2; EN 61000-3-3; EN 61000-4-2; EN 61000-4-4; EN 61000-4-5; EN 61000-4-8; EN 61000-4-11

EN 61547

EN 62560

