

## TECHNICAL SPECIFICATION

### Remote control (electrical)




#### **Description:**

The device switches off/on the breaker to which manual operative rotary mechanism is mounted


- two operating positions of the executive mechanism fixed at 90°

#### **Mounting:**

The base is mounted with bolts right on the cover (scheme 1 mounting), and the handle is mounted at the door of the distribution box, using an extension axis it is joined to the base



## Dimensions:

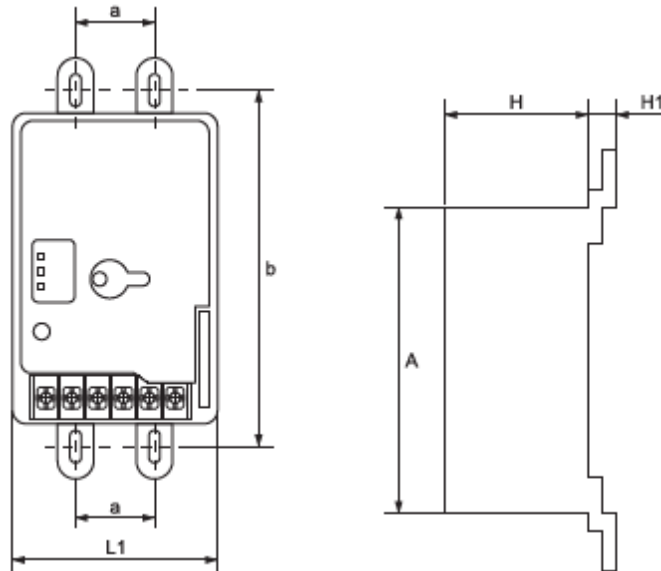

### - Electrical remote control for MCCB DS1

Type of the breaker	Dimensions					Packing / Box (pcs)	Catalogue number Operating voltage(V)	
	A	A1	B	B1	H		230V	400V
DS1 125	103.5	110	30	90	92	1	44912	44907
DS1 160	103.5	110	35	90	92	1	44913	44908
DS1 250	139	-	132	-	105	1	44914	44909
DS1 400	226	-	132	-	132	1	44915	44910
DS1 630	226	-	132	-	132	1	44916	44911
DS1 800	226	-	132	-	132	1	44916	44911

### - Electrical remote control for MCCB DS1 MAX

Type of the breaker	Dimensions					Packing / Box (pcs)	Catalogue number Operating voltage(V)	
	L1	B	B	H	H1		230V	400V
DS1 MAX 63A	116	90	50	77	12.5	1	44917M	44906M
DS1 MAX 125A	116	90	50	77	12.5	1	44912M	44907M
DS1 MAX 250A	116	90	70	77	15	1	44914M	44909M
DS1 MAX 400A	176	130	107	115	27	1	44915M	44910M
DS1 MAX 630/800A	176	130	119	115	31	1	44916M	44911M

