

TECHNICAL SPECIFICATION

LED Cabinet Light – CAB-20



Technical data

- Power: 12W
- Color temperature: white / warm white
- Rated voltage: 12VDC
- Power Supply: control gear – driver for 12VDC (not included in the set)
- Type of LED: SMD5050
- Light source: Epistar Taiwan
- Luminous flux: 1050lm
- Protection against dust and moisture: IP20
- Housing: aluminum body 500x42x15mm
- Diffuser: PMMA
- Long life : 30000h
- Beam angle: 120°
- Colour rendering index: Ra≥80


Areas of application

- Kitchen facilities
- Service areas
- Residential buildings
- Retail Showcases and counters

Product benefits


- Safety, low voltage operation
- Uniform and gentle illumination
- Low power consumption
- Repeated switch on/off does not affect life span
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays

Variants and dimensions

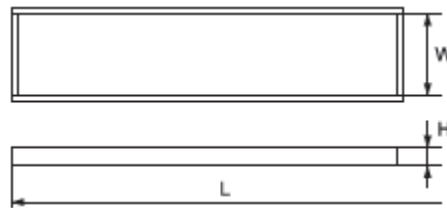

Watt	Lumen (lm)	Colour temp.	Colour body	Size			Catalogue number	Packing (pcs)
				Length	Width	Height		
12W	1050	white	grey	500	42	15	920LED011	60
12W	1050	warm white	grey	500	42	15	920LED111	60

Energy efficiency

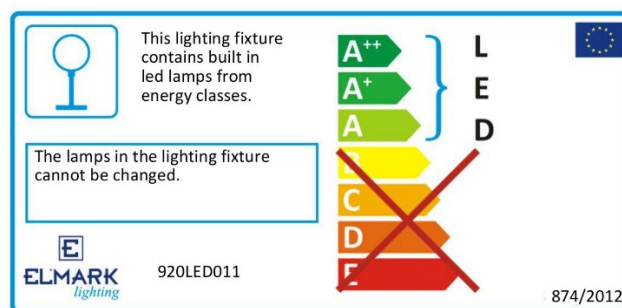

Barcodes

Barcode	Catalogue number
3800131185761	920LED011
3800131185778	920LED111

Standards

EN 60598-1

EN 60598-2-1

EN 55015

EN 61547

EN 61000-3-2

